


Industrial Light Series

www.jianyulighting.com

Model B and Model C

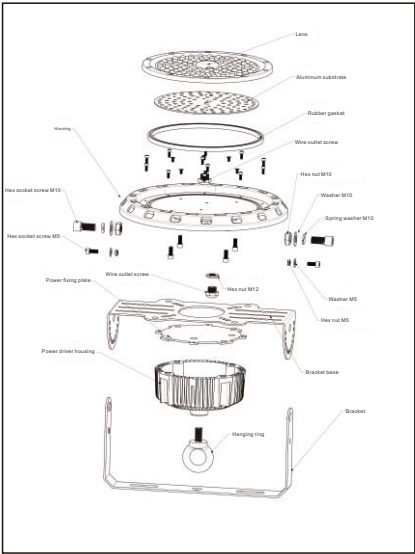

Model	Power	Size(mm)	Weight(g)	CRI(RA)	Luminous Efficiency	Viewing Angle	IP Grade
JIB240-50W	50W	240*240*34	950	≥80	160LM/W	60°/90°/120°	Ip65
JIB290-100W	100W	290*290*42	1240	≥80	160LM/W	60°/90°/120°	Ip65
JIB340-150W	150W	340*340*48	1390	≥80	160LM/W	60°/90°/120°	Ip65
JIB386-200W	200W	386*386*57	2900	≥80	160LM/W	60°/90°/120°	Ip65
JIC290-100W	100W	290*290*42	990	≥80	160LM/W	60°/90°/120°	Ip65
JIC340-150W	150W	340*340*46	1400	≥80	160LM/W	60°/90°/120°	Ip65
JIC386-200W-C	200W	386*386*54	2320	≥80	160LM/W	60°/90°/120°	Ip65