


Model MF LED Flood Light

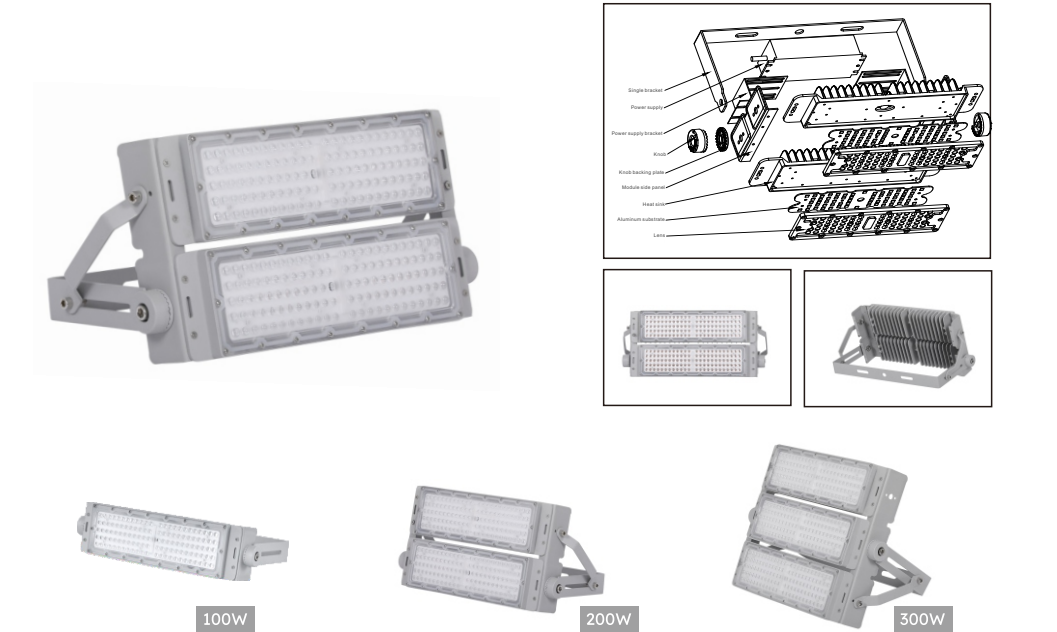

Model	Power	Size(mm)	Weight(g)	CRI(RA)	Luminous Efficiency	Viewing Angle	IP Grade
JMFB350-100W	100W	350*100*45	1200	≥80	160LM/W	30°/60°/90°	Ip65
JMFB400-100W	100W	400*100*70	2200	≥80	160LM/W	30°/60°/90°	Ip65
JMFB200-200W	200W	400*200*70	3500	≥80	160LM/W	30°/60°/90°	Ip65
JMFB300-300W	300W	400*300*70	5200	≥80	160LM/W	30°/60°/90°	Ip65
JMFB400-400W	400W	400*400*70	6100	≥80	160LM/W	30°/60°/90°	Ip65
JMFB400-500W	500W	400*500*70	7800	≥80	160LM/W	30°/60°/90°	Ip65
JMFB600-600W	600W	400*600*70	9800	≥80	160LM/W	30°/60°/90°	Ip65
JMFB300-600W	700W	870*300*70	10000	≥80	160LM/W	30°/60°/90°	Ip65
JMFB400-800W	800W	870*400*70	11800	≥80	160LM/W	30°/60°/90°	Ip65
JMFB500-1000W	1000W	870*500*70	15000	≥80	160LM/W	30°/60°/90°	Ip65
JMFB600-1200W	1200W	870*600*70	1920	≥80	160LM/W	30°/60°/90°	Ip65